



Applications | 產品用途



Optional

- **Protective cover**
Protect the pump from sun and rain
- **L-shaped mounting bracket**
Allows the pump to be wall-mounted

Material

Plastic Galvanized steel Stainless steel

● Inlet/outlet

Discharge

1 Inch / 25mm ¾Inch / 20mm

Operating conditions

- Ambient temperature: Max. +40°C
- Liquid temperature: +4°C ~ +40°C
- Applicable liquids:
Clean water or non-corrosive liquids without solid particles, with properties similar to water.

Features

- Automatically boosts water pressure during usage and stops operation when water is not in use.

可選配

- **保護罩**
防止泵浦日晒雨淋
- **L型固定架**
可將泵浦架至牆壁上



材質

塑膠 鍍鋅 白鐵

● 出入口

口徑

1 Inch / 25mm ¾Inch / 20mm

使用條件


- 環境溫度 : Max. +40°C
- 液體溫度 : +4°C ~ +40°C
- 適用液體 : 清水或是無腐蝕性、無含固體顆粒性質接近水的液體。

產品特性

- 使用水時自動加壓供水，不用水時自動停止運轉。


Dimensions | 外觀尺寸

- Unit:mm -

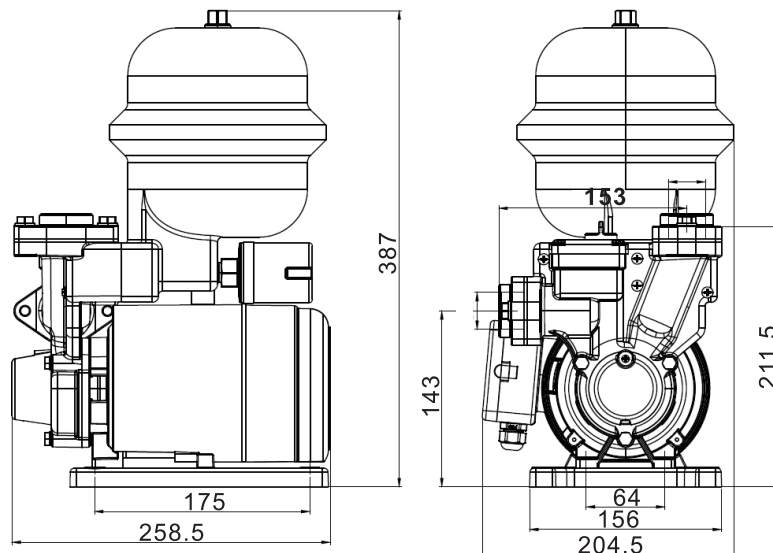

Performance Curve

特性曲線

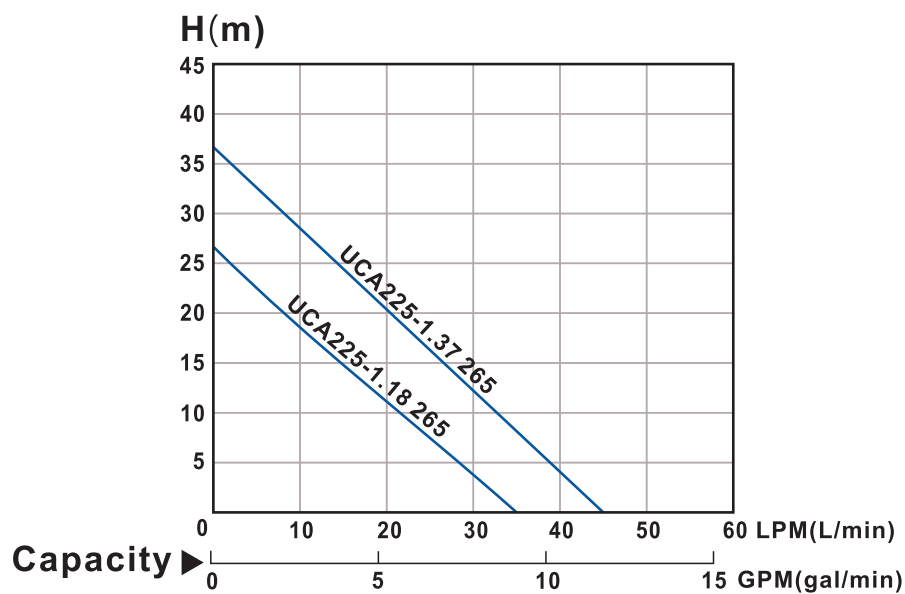

TYPE 型號	POWER 馬力	DISCHARGE 口徑	VOLTAGE 電壓	MAX HEAD 最大揚程	MAX CAPACITY 最大水量	WEIGHT 重量
	HP (kW)	Inch(mm)	V	m	L/min	Kg
UCA225-1.18 265	¼ (0.18)	1" (25)	200-240	26	35	9.5
UCA225-1.37 265	½ (0.37)	1" (25)	200-240	36	45	12