



Applications | 產品用途



Optional

- **Protective cover**
Protect the pump from sunlight and rain
- **Dry-run Protection Device**
Automatically cuts off power if pump temperature exceeds 55°C
- **L-shaped mounting bracket**
Allows the pump to be wall-mounted

Material

Plastic Galvanized steel Stainless steel

- **Inlet/outlet**

Discharge

1 Inch / 25mm 3/4Inch / 20mm

Operating conditions

- Ambient temperature: Max. +40°C
- Liquid temperature: +4°C ~ +40°C
- Suction head: Max. 6m
- Applicable liquids:
Clean water or non-corrosive liquids without solid particles, with properties similar to water.

Features

- Special flow design ensures efficient liquid transfer
- Built-in motor protection device prevent motor from burning.

可選配

- **保護罩**
防止泵浦日晒雨淋
- **無水斷電裝置**
泵浦超過 55°C 時，自動斷電



- **L型固定架**
可將泵浦架至牆壁上

材質

塑膠 鍍鋅 白鐵

- **出入口**

口徑

1 Inch / 25mm 3/4Inch / 20mm

使用條件


- 環境溫度 : Max. +40°C
- 液體溫度 : +4°C ~ +40°C
- 吸入揚程 : Max. 6m
- 適用液體 : 清水或是無腐蝕性、無含固體顆粒性質接近水的液體。

產品特性


- 本機型特殊水流設計，液體輸送佳。
- 電動機內裝設有保護裝置，可防止馬達燒損。

Dimensions | 外觀尺寸

- Unit:mm -

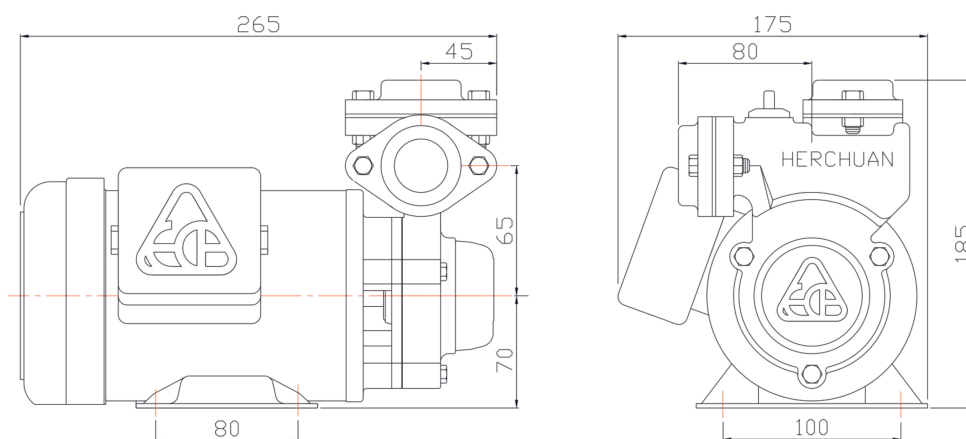

Performance Curve | 特性曲線

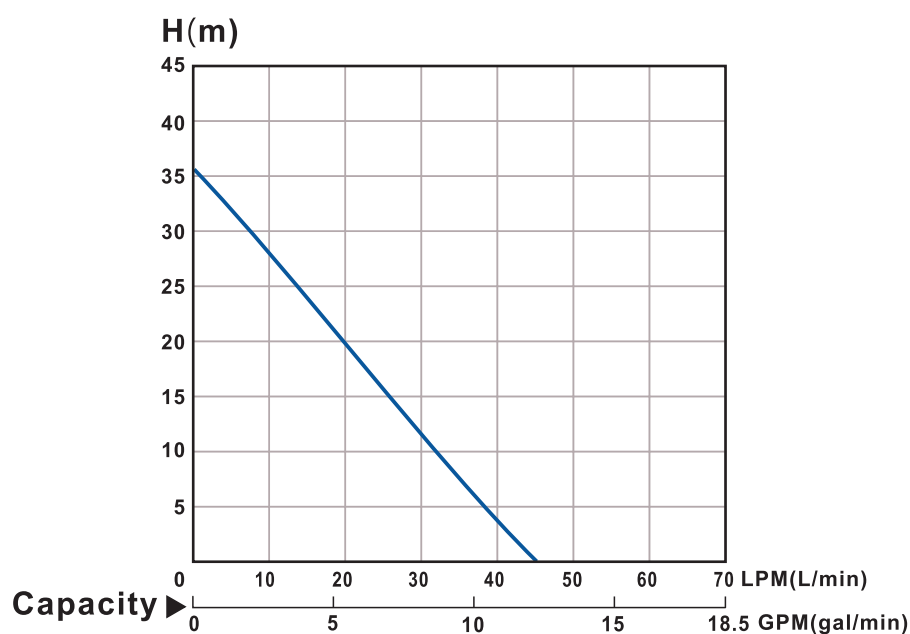

TYPE 型號	POWER 馬力	DISCHARGE 口徑	VOLTAGE 電壓	MAX HEAD 最大揚程	MAX CAPACITY 最大水量	WEIGHT 重量
	HP (kW)	Inch(mm)	V	m	L/min	Kg
UCP225-1.37 265	½ (0.37)	1" (25)	200-240	36	45	9.5