

EQP Silent Centrifugal Pump



Applications | 產品用途



Optional

- **Protective cover**
Protect the pump from sunlight and rain
- **L-shaped mounting bracket**
Allows the pump to be wall-mounted

Material

Plastic Galvanized steel Stainless steel

- **Inlet/outlet**

Discharge

1 Inch / 25mm 3/4Inch / 20mm

Operating conditions

- Ambient temperature: Max. +40°C
- Liquid temperature: +4°C ~ +40°C
- Suction head: Max. 6m
- Applicable liquids:
Clean water or non-corrosive liquids without solid particles, with properties similar to water.

Features

- The pump has a built-in temperature protection switch to prevent the pump from idling when the water supply is insufficient. When the water temperature exceeds 55°C, the pump will automatically shut off.
- The impeller adopts a centrifugal multi-stage design, which is quiet and low-noise during use.

可選配

- **保護罩**
防止泵浦日曬雨淋
- **L型固定架**
可將泵浦架至牆壁上

材質

塑膠 鍍鋅 白鐵

- **出入口**

口徑

1 Inch / 25mm 3/4Inch / 20mm

使用條件

- 環境溫度: Max. +40°C
- 液體溫度: +4°C ~ +40°C
- 吸入揚程: Max. 6m
- 適用液體: 清水或是無腐蝕性、無含固體顆粒性質接近水的液體。


產品特性

- 泵浦內置溫度保護開關，防止水源不足時泵浦空轉。當水溫超過+55°C時，泵浦自動斷電。
- 葉輪採離心多段設計，使用時安靜低噪音。

EQP 靜音揚水泵浦




Dimensions | 外觀尺寸

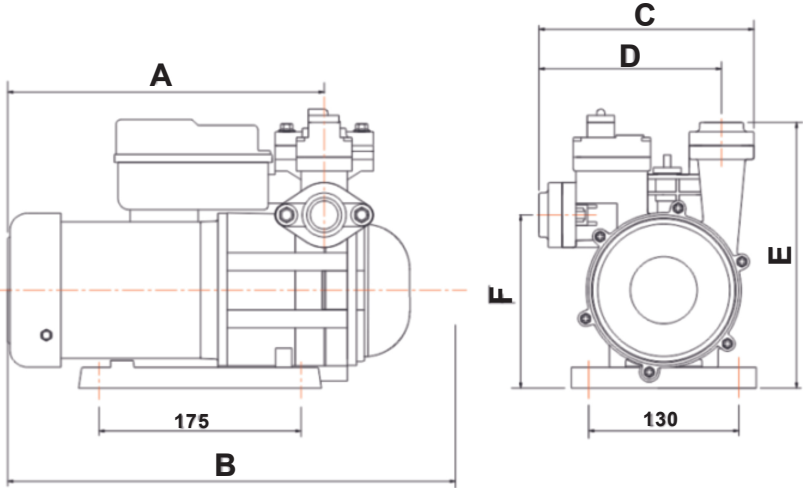

- Unit:mm -

TYPE 型號	A	B	C
	280	365	185
EQP225-3.37 265	D	E	F
	158	230	151
EQP225-4.75 265	A	B	C
	280	390	185
	D	E	F
	158	230	151

Performance Curve | 特性曲線

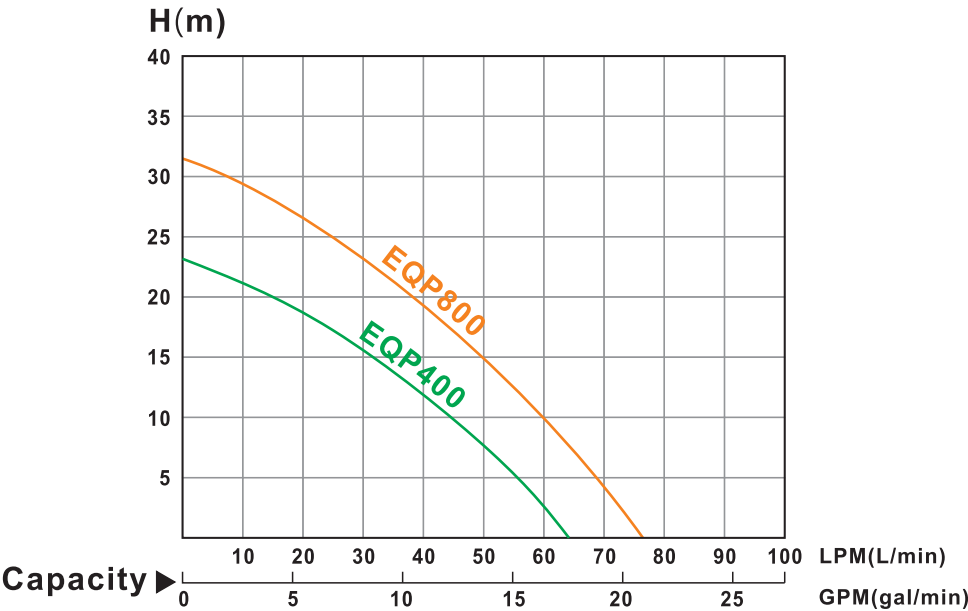

TYPE 型號	POWER 馬力	DISCHARGE 口徑	VOLTAGE 電壓	AMPS 電流	MAX HEAD 最大揚程	MAX CAPACITY 最大水量	SERIES 產品系列
	HP (kW)	Inch(mm)	V	A	m	L/min	
EQP225-3.37 265	½ (0.37)	1" (25)	220-240	2.6	23	64	EQP400
EQP225-4.75 265	1 (0.75)	1" (25)	220-240	3.8	32	76	EQP800