



Applications | 產品用途



Other materials

CUS 不鏽鋼齒輪泵浦 | 油機 Stainless Steel Belt-driven Gear Pump | Oil Type

機種其它材質



Optional

● Steel base plate

Mounting platform for drive motor and gear pump.

選配

● 鐵板座

供傳動馬達與齒輪泵浦之固定平台

Applicable type 適用機種	Compatible motor power 可搭配馬力	
	HP	(kW)
A06 CU1-012	¼~½	0.18~0.37
A06 CU1-020	½~1	0.37~0.75
A06 CU1-025	1~2	0.75~1.5
A06 CU1-030	1~2	0.75~1.5

Applicable type 適用機種	Compatible motor power 可搭配馬力	
	HP	(kW)
A06 CU1-040	2~3	1.5~2.2
A06 CU1-050	3~5	2.2~3.7

Using Ref | 使用參考



Features


- Suitable for suction and transfer of various oils.
- Automatic vacuum suction.
- Simple structure and easy maintenance.

產品特性

- 各種油類吸送
- 自動真空吸液
- 結構簡單，維護方便

Dimensions | 外觀尺寸

- Unit:mm -

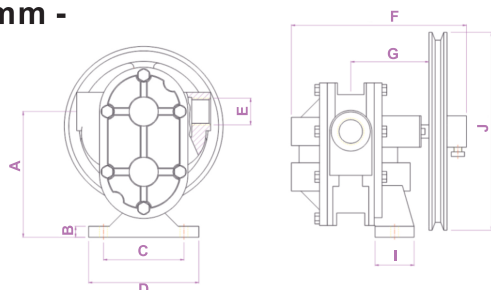


A06 CU1-012



A06 CU1-020
A06 CU1-025
A06 CU1-030

TYPE 型號	A	B	C	D	E	F	G	I	J	SHAFT DIA. 軸徑	NO.OF GROOVES 溝槽數
A06 CU1-012	102	10	55	85	21	160	72	65	178(7")	14	1A
A06 CU1-020	130	12	101	140	27	202	93	50	255(10")	17	1B
A06 CU1-025	130	12	101	140	33	209	100	50	255(10")	17	1B
A06 CU1-030	130	13	101	140	42	209	130	47	255(10")	17	1B

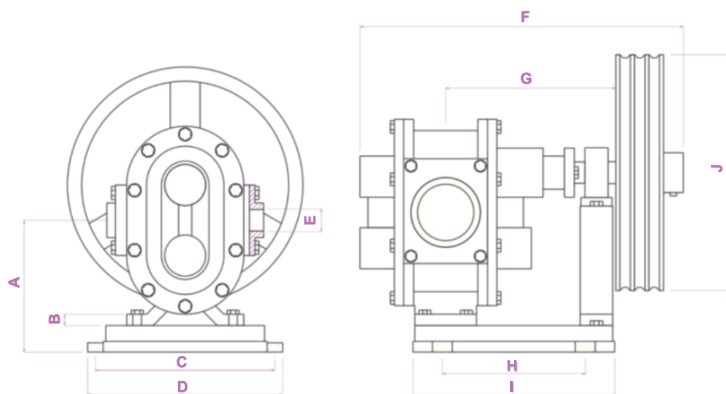

A06 CU1-040
A06 CU1-050



A06 CU1-080

TYPE 型號	A	B	C	D	E	F	G	H	I	J	SHAFT DIA. 軸徑	NO.OF GROOVES 溝槽數
A06 CU1-040	190	18	172	203	48	273	120	110	140	305(12")	24	2B
A06 CU1-050	205	18	177	208	60	309	135	129	158	305(12")	24	2B
A06 CU1-080	195	-	270	295	89	447	245	218	305	356(14")	30	3B
A06 CU1-100	205	18	320	350	110	550	310	300	405	406(16")	38	3B

Specification | 規格

TYPE 型號	DISCHARGE 口徑	POWER 馬力	SPEED 轉速	CAPACITY 流量	PRESSURE 壓力
	INCH(mm)	HP	RPM	L/min	kg/cm ²
A06 CU1-012	½"(12)	½	450	14	3
A06 CU1-020	¾"(20)	½ - 1	430	35	4
A06 CU1-025	1"(25)	1 - 2	430	48	4
A06 CU1-030	1¼"(30)	1 - 3	430	56	4
A06 CU1-040	1½"(40)	2 - 3	430	95	4
A06 CU1-050	2"(50)	3 - 5	430	150	4
A06 CU1-080	3"(80)	10	350	260	4
A06 CU1-100	4"(100)	10	450	740	2

TYPE 型號	DISCHARGE 口徑	POWER 馬力	SPEED 轉速	CAPACITY 流量	PRESSURE 壓力
	INCH(mm)	HP	RPM	L/min	kg/cm ²
A06 CUS-012	½"(12)	½	450	14	3
A06 CUS-020	¾"(20)	½ - 1	430	35	4
A06 CUS-025	1"(25)	1 - 2	430	48	4
A06 CUS-030	1¼"(30)	1 - 3	430	56	4
A06 CUS-040	1½"(40)	2 - 3	430	95	4
A06 CUS-050	2"(50)	3 - 5	430	150	4
A06 CUS-080	3"(80)	10	350	260	4